
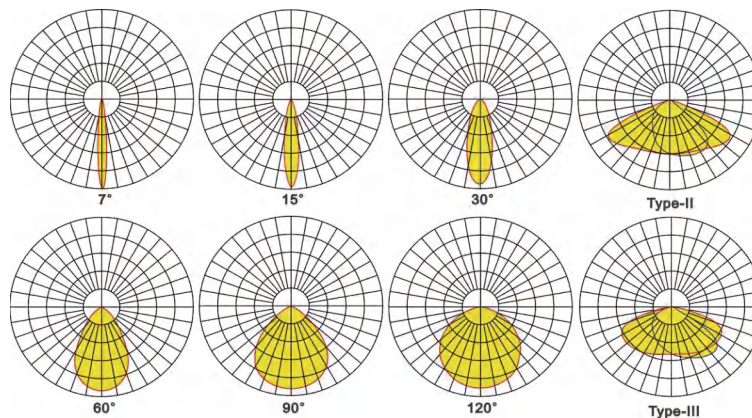



Features

- Efficiency: up to 160Lm/W, 140Lm/W ~ 190Lm/W available
- LED Chip: lumileds 3030 / 5050 or Bridgelux 3030
- SDCM: <5
- Beam angle: 7° / 15° / 30° / 60° / 90° / 120° / Type I / Type II / Type III PC lens
- IP Rating: IP66
- Installation: bracket
- Certifications: CE, RoHS
- Warranty: 5 years

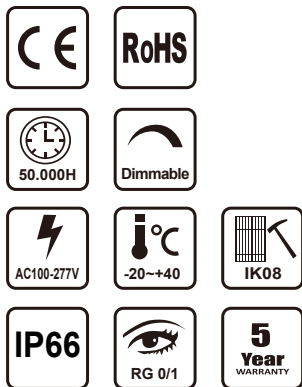

Applications

- Stadium
- Wharf
- Airport
- Dock
- Tower crane
- Football field
- Basketball court
- Tennis court
- Golf course
- Large outdoor parking lot





Specifications

Product Code	HMG4-500W HMG4-600W	HMG4-1000W HMG4-1200W	HMG4-1500W HMG4-1800W
Power	500W 600W	1000W 1200W	1500W 1800W
Input Voltage	100-277VAC		
PF	0.90@220VAC		
Dimming (Optional)	0-10V / DALI		
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6500K		
Luminous Flux	500W-80000Lm 600W-96000Lm	1000W-160000Lm 1200W-192000Lm	1500W-240000Lm 1800W-280000Lm
Efficiency	160Lm/W±10% (Ra>70 5000K)		
Luminous Flux	500W-95000Lm 600W-114000Lm	1000W-190000Lm 1200W-228000Lm	1500W-285000Lm 1800W-342000Lm
Efficiency	190Lm/W±10% (Ra>70 5000K)		
Beam Angle	7° / 15° / 30° / 60° / 90° / 120° Type2 / Type3 PC lens		
Operation Temp	-40°C~+50°C , 20~95% RH No condensation		
Storage Temp	-20°C~+85°C , 10~95% RH No condensation		
Life Span	Ta 50°C L70>54000 hours		
IP / IK Class	IP66 / IK08		
Certificate	CE, RoHS		
Lamp Body Color	Housing: die-casting aluminum	Color: black (RAL9005)	Lens: PC
Product Warranty	5 years		
Installation Mode	Surface mount / Bracket mount		
Product Size (mm)	637*483*134	897*673*134	1286*673*134
Packing Size (mm)	672*534*188	990*763*220	1378*763*220
Gross Weight (kg)	16.5	40	56

